

DEVSPORT

www.DEVSPORTPARTS.COM

SPLITTER SUPPORT RODS INSTALLATION

Install shall be made entirely at your own risk. DevSport is **not** responsible for any and all damages caused by the improper installation of any product. Professional installation is **recommended**.

Note: This is a general outline for installation. Actual application will vary slightly. Highly recommend using thread locking for all nuts and threads within the barrel.



Tools Required

7mm Wrench
8mm Wrench
Phillip Screw Driver
7/16" Drill Bit
Power Drill

STEP 1




When adjusting Support Rod length, each side has a maximum extension length of 3/4". Adjust each side to equal length. This keeps strength within the barrel and prevents failure.

STEP 2



When spacing the Support Rods, standard distance is 5-7" from the badge.

STEP 3

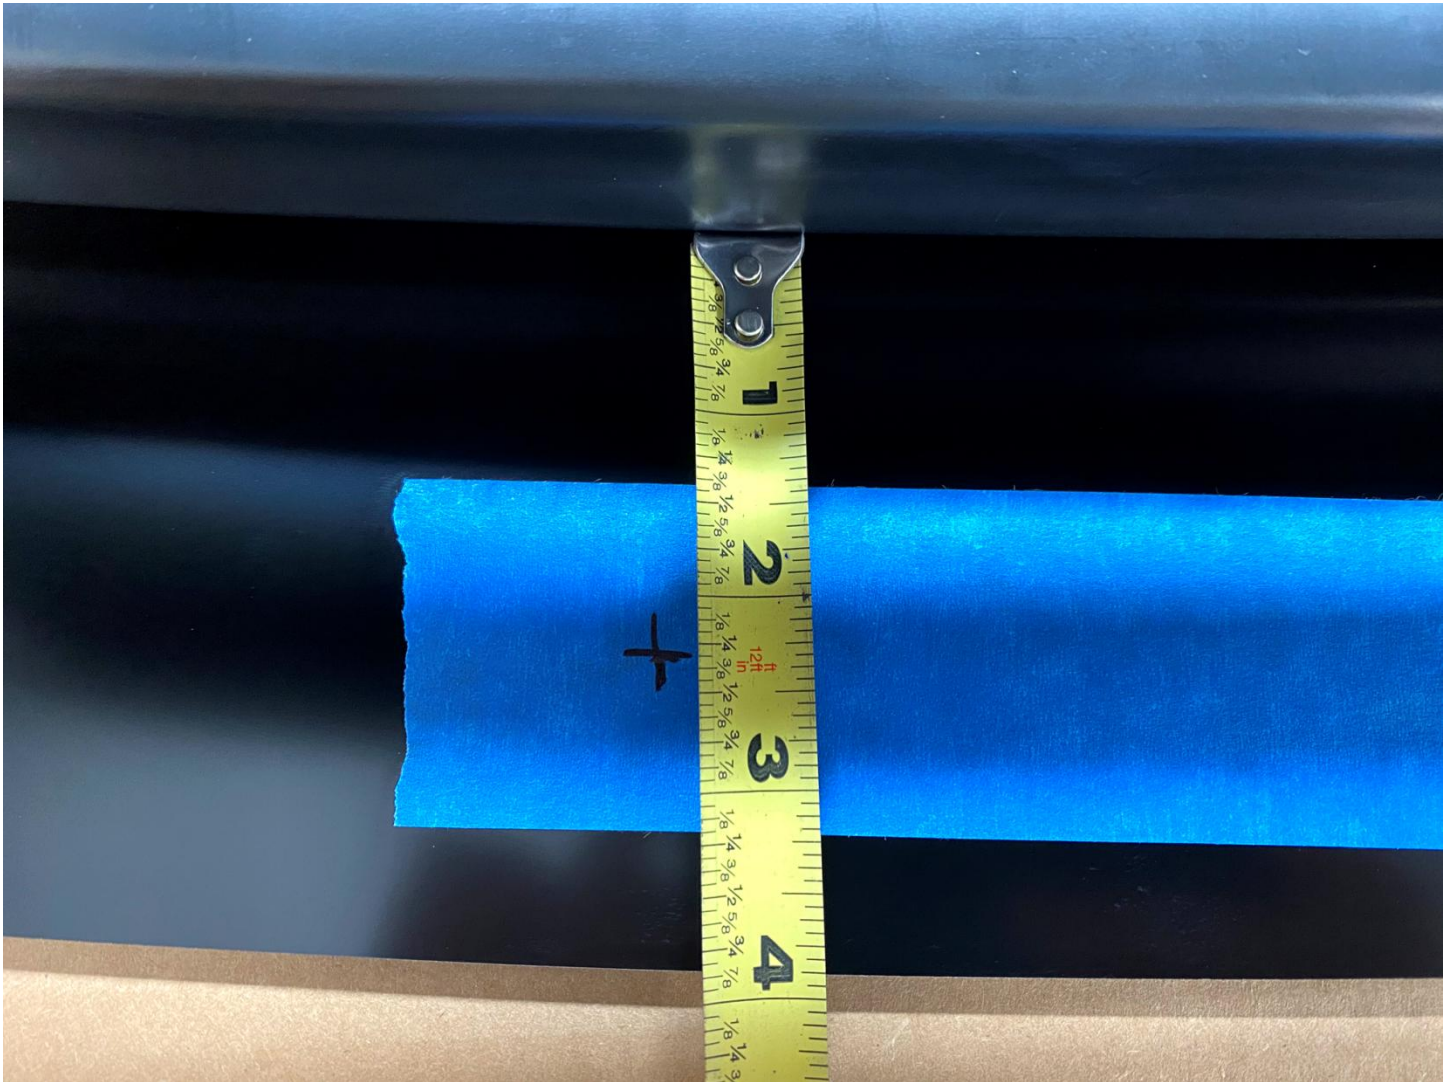

- Support Rods should be installed a tad more than the middle point of the Splitters extension.
- In this example, the Splitter extends about 4". Thus the Support Rod should be installed a tad more than 2" from the bumper/lip.
- Support Rod must be installed at least 1" from the edge of the Splitter.
- Following these steps will provide proper strength and support for the Splitter.

STEP 4



Install Support Rods in a vertical position. Tighten all nuts once Support Rod is mocked up in finally position.

Note: Installing Support Rods on the side of the grill etc, will not properly strengthen and support the Splitter.